

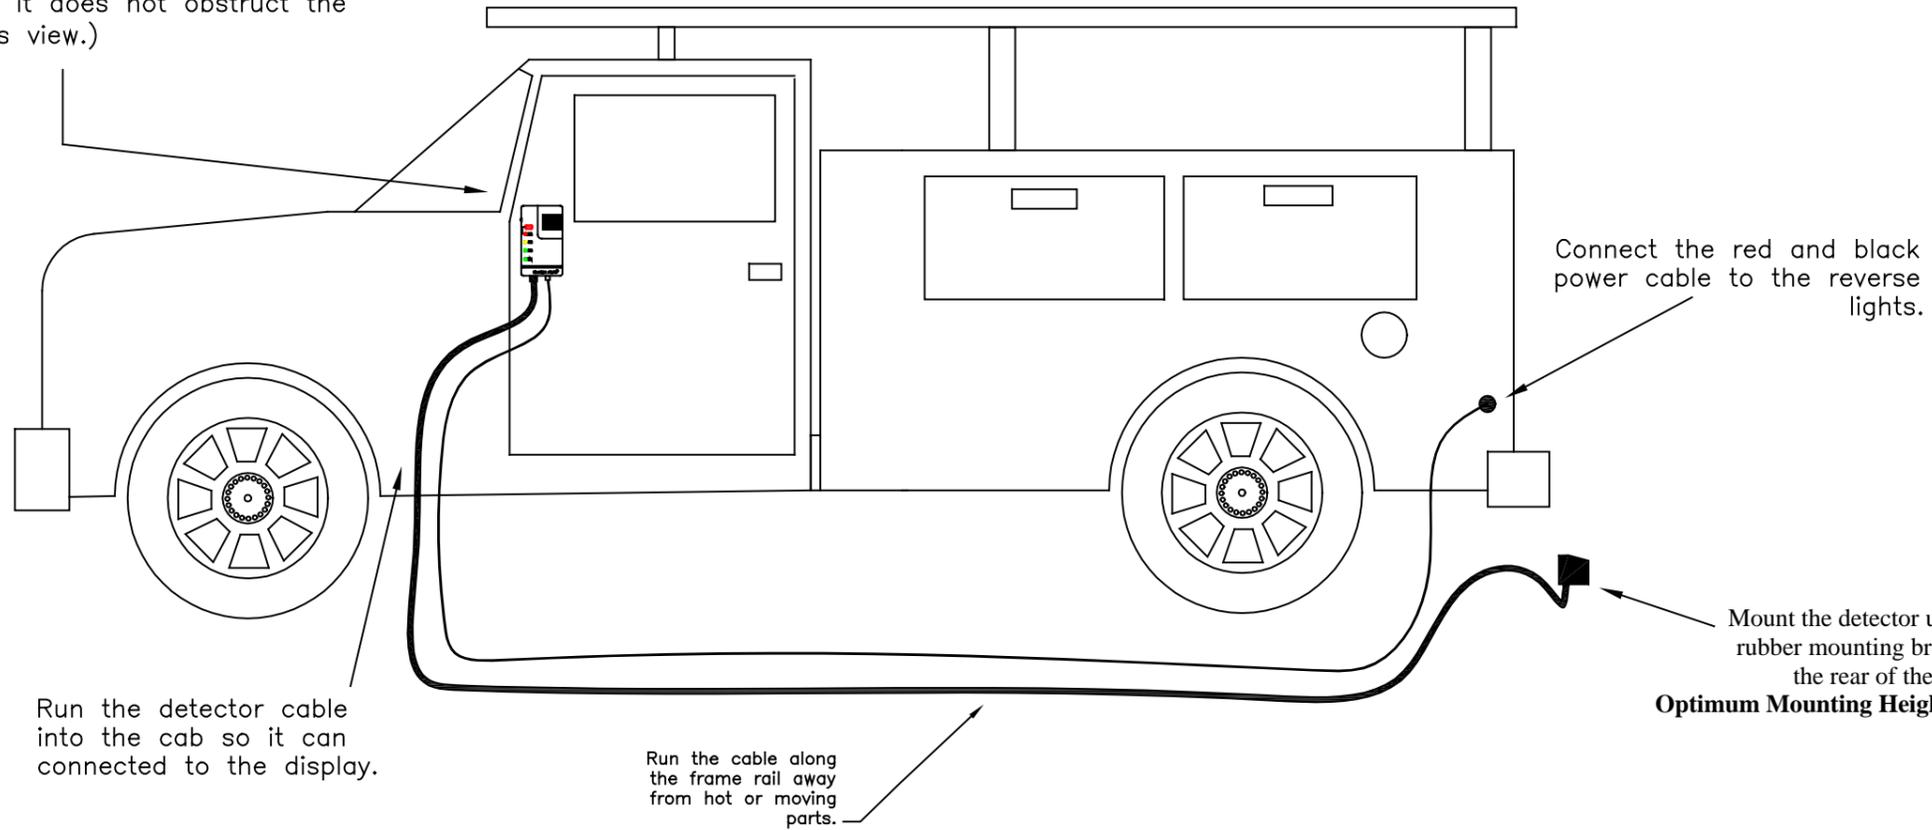



The display can be mounted on the A, B, or C pillar or on the dash board. (Install the display where it does not obstruct the drivers view.)

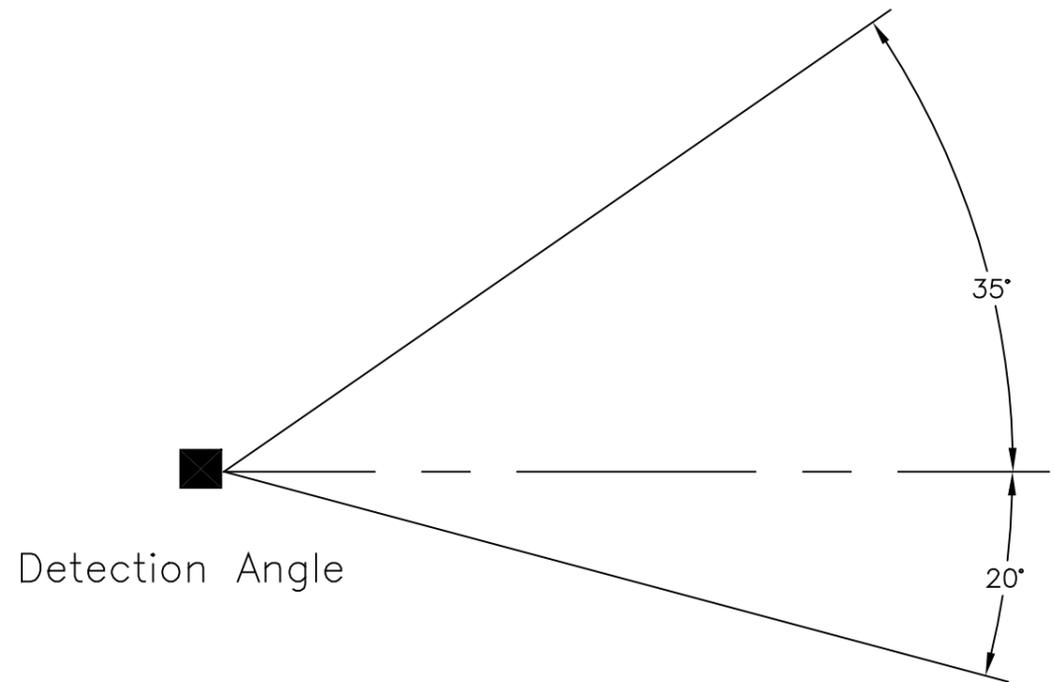

Mount the detector using the rubber mounting bracket on the rear of the vehicle.
Optimum Mounting Height = 24"

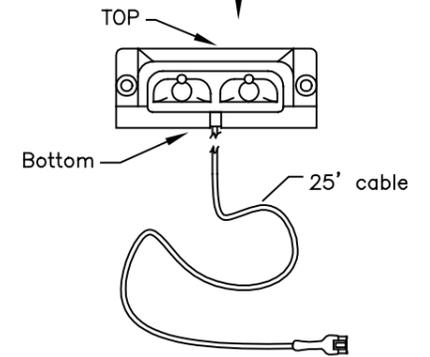

Detection Angle

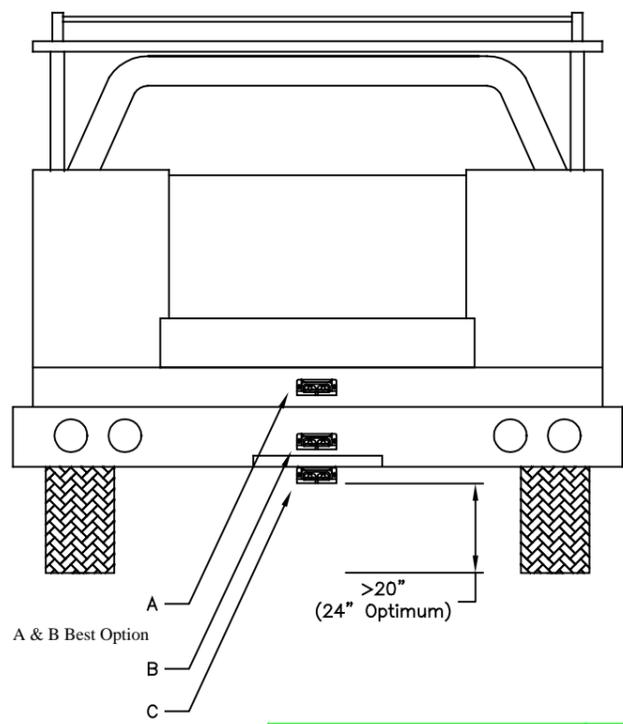

A & B Best Option

Truck: For example only.

USED IN:

DRAWN BY J. Cina		SONAR SAFETY SYSTEMS, INC.	
CHECKED BY		12411 MCCANN DR. SANTA FE SPRINGS, CA 90670	
APPROVED BY		HS-100F Schem	
DIMENSIONS IN INCHES		PART NO.	110107
		SIZE	DWG NO. 110107-001
ISSUE DATE:		SCALE	NS
		SHEET	1 OF 1