


The display and bracket can be mounted on the A, B, or C pillar or on the dash board. (Install the display where it does not obstruct the drivers view.)

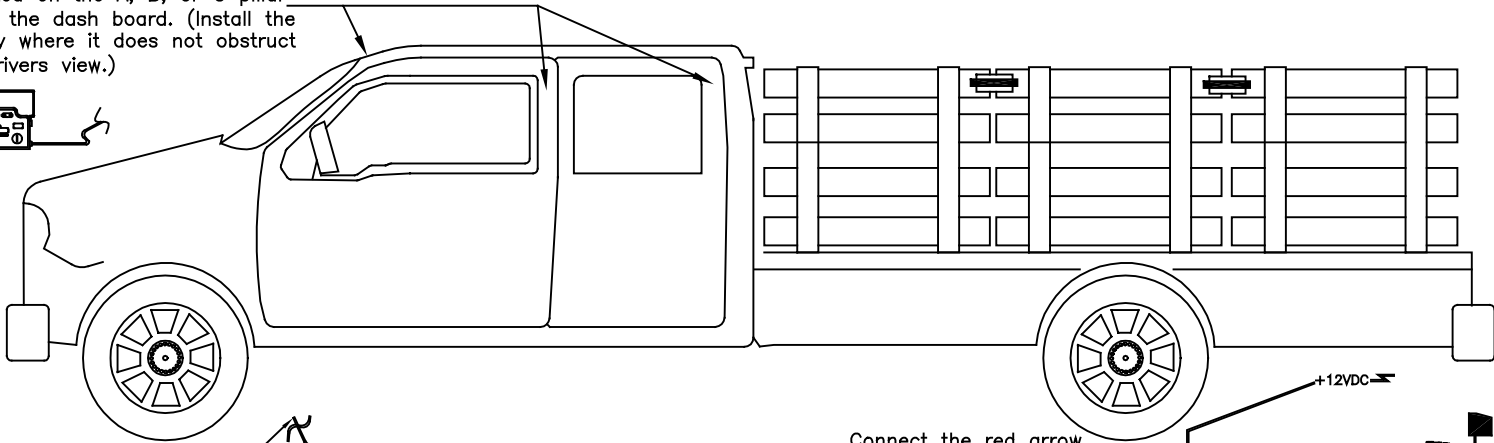

Run the cable into the cab so it can be connected to the display.


26' Intermediary Cable for the display

Connect the red arrow power cable to the reverse light.


+12VDC

Mount the control box under the vehicle away from moving parts.

Detector extension cables, 13'. Note: Do not modify the cable length or use any type of grease in the connectors.

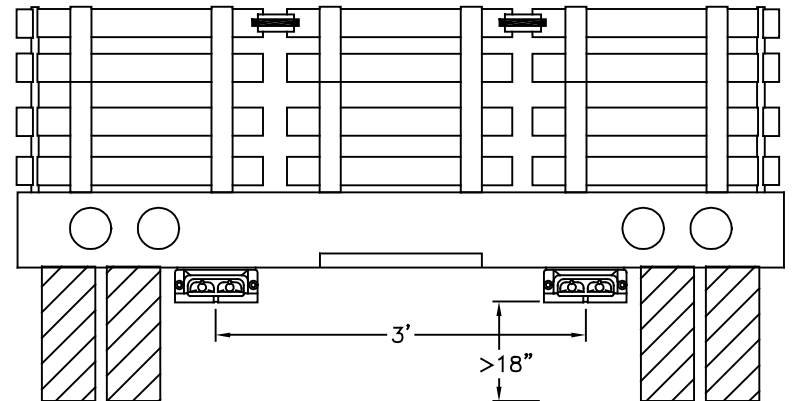

The detectors can be mounted under the bumper with the L-brackets or on the face or top of the bumper. Make sure that any overhang above or below the detectors is kept to a minimum. See detection angle.

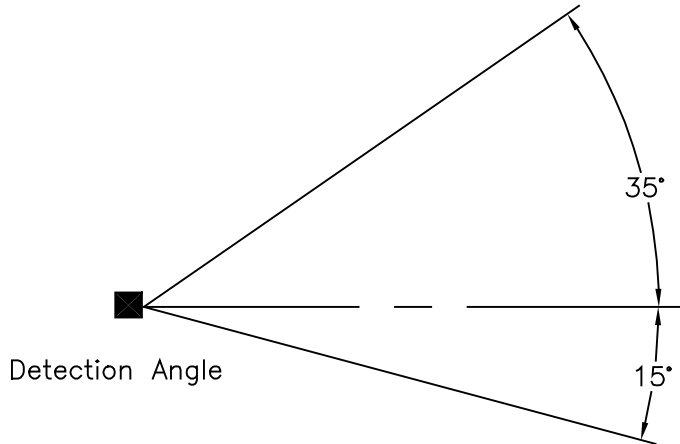

Detection Angle

Truck: For example only.

USED IN:

DIMENSIONS IN INCHES	DRWN BY	J. Cina	SONAR SAFETY SYSTEMS, INC.	
	CHEKED BY		12411 MCCANN DR. SANTA FE SPRINGS, CA 90670	
	APPROVED BY		HS-300 Install	
	PART NO.	110114	REV	A
	SIZE		DWG NO.	110114-002
	ISSUE DATE:		SCALE	NS
			SHEET	1 OF 1